

DATA RATE FOR DRAIN COVERING SLAB (1.20 X 0.60)


A	KSRB 4.2.2: Providing and laying in position reinforced cement concrete of design mix M20 with OPC cement @ 320 kgs, with 20mm and down size graded metal coarse aggregates @ 0.87cum and fine aggregates @ 0.459cum with superplasticizer @ 3lts conforming to IS9103-1996 reaffirmed 2009, machine mixed, concrete laid in layers not exceeding 15cms thick, vibrated for all works in foundation plinth and ground floor level for roof slabs, staircase, lintels, retaining walls, return walls, walls (any thickness) including attached plaster, columns, piers, abutments, pillars, posts, struts, buttresses, string or facing courses, parapets, coping bed blocks anchor blocks, plain window chills, fillets, etc., including cost of all materials, labour HOM of machinery, curing complete as per specification Specification No. KBS 4.1; 4.6 (P.13/14 11 PW,P & IWTD,B'lore Circle SR-2014-15) (RCC 1:1.5:3)									
	cement concrete 1:2:0									
	Cover slab size (1-00' X 0.60')									
		1	1.20	0.60	0.10	0.072	6065.28	436.70		
	Basic Rate	5616.00								
	Add 8% Area weightage	449.28								
	Total	6065.28								
B	KSRB 4.6.4: Providing and removing centering, shuttering, strutting, propping etc., and removal of form work of vertical surface such as walls of any thickness, including attached plaster, buttressess, plinth and string courses cost of all materials, labour complete as per specification (P. 15/4.31 PW,P & IWTD,B'lore Circle SR-2014-15)									
	centering									
	sides	* 1	3.60		0.10	0.36				
	blm	-1-	-1.20	-0.00		-0.72				
						(1.08)	292.68	246.09		
	Basic Rate	271.00								
	Add 8% Area weightage	21.68				0.36		105.40		
	Total	292.68								
C	KSRB 4.9.2: Providing T.M.T STEEL REINFORCEMENT FOR RCC work including straightening, cutting, bending, hooking, placing in position tapping and / or welding wherever required tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour HOM of machinery complete as per specifications. (P.19/4.46 PW,P & IWTD,B'lore Circle SR-2014-15)								tonne	
	steel									
	main bars 12mm 100mm C/C spacing	1	7	1-10	0.89	6.05	6.85			
	Dist bars 12mm 100mm C/C spacing	1	(12)	(0.55)	0.89	5.87				
				"	"	(12.72)	12.72	996.6		
						(0.01)	78351.84	997.18		
	Basic Rate	72548.00								
	Add 8% Area weightage	5803.84				0.0125 = 2 MT		996.6		
	Total	78351.84								
	For 1 Sqm=	4749.88	/ 0.72 =	2137.14				1749.98		
		1538.74	Say	2430.00				1538.74		

Pay Two thousand One hundred and 2100.00 / \$

ಅಭೀಕ್ಷಿತ ಅಭಿಯಂಶರರು

2. 2006 12 25 日

July 28, 1900

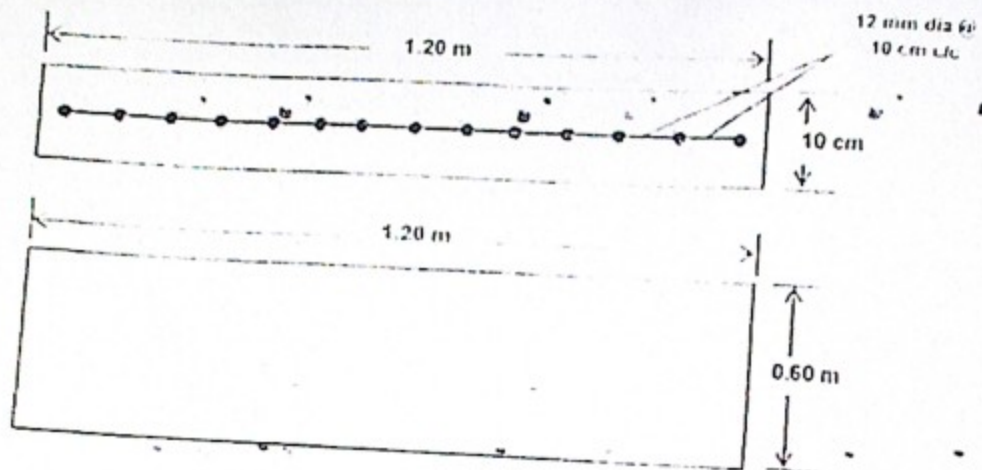

[Handwritten signature]

[Handwritten signature]

[Handwritten signature]
Executive Engineer

Project Engineer, Bangalore
M. K. Devapur Division
Bangalore-560 048